


218.00 EUR
 incl. 19% VAT, plus [shipping](#)

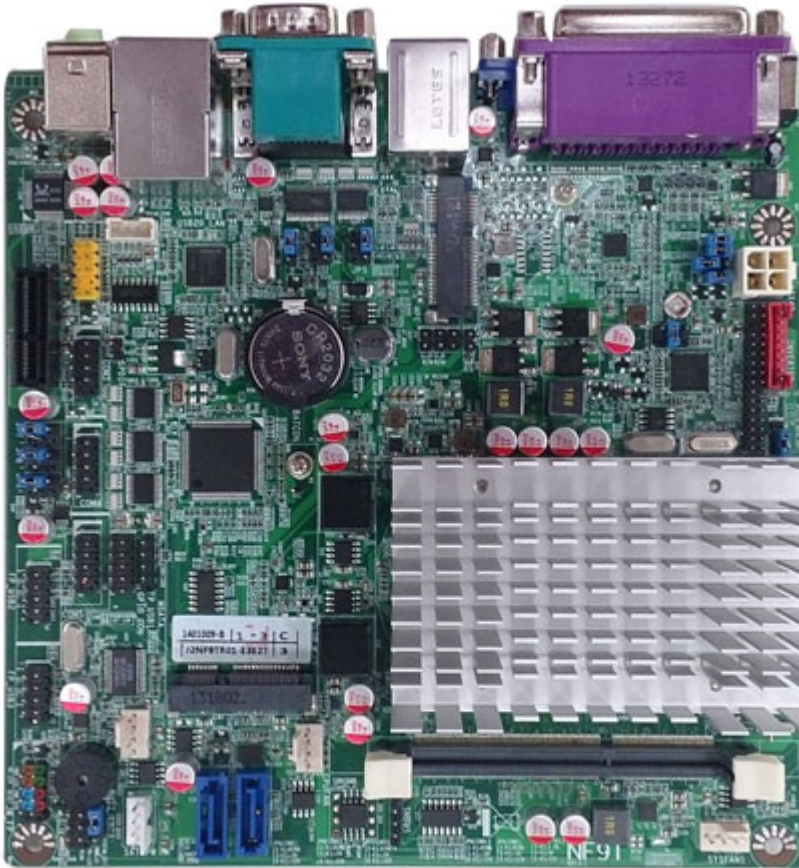

- INTEL® Bay Trail-M N2930 SoC Processor
- 1 * SO-DIMM slot (Max 4GB)
- 2 * Mini PCIE slot
- 2 * RTL8111G PCI-E Gigabit LAN
- Realtek ALC662 HD Audio CODEC with 2-Channel
- Support 1 * 2.5" SATA Device (Max Height 9.5 mm)
- Support 1 * m-SATA SSD Device (Mini PCI-E)
- 1 * USB 3.0 port
- 3 * USB 2.0/1.1 ports
- 2 * RJ-45 ports(Gigabit LAN)

| | |
|------------------|--|
| Form Factor | |
| Dimensions | Mini-ITX (6.7-in x 6.7-in, 170 x 170mm) |
| Processor System | |
| CPU | Intel® Atom™ Baytrail-M/D/I Processor Supports Hyper-Threading Technology |
| Core Number | (By CPU) |
| Max Speed | (By CPU) |
| L2 Cache | (By CPU) |
| Chipset | N/A |
| BIOS | UEFI |

| | |
|---------------------------|--|
| Expansion Slot | |
| Mini-PCIe | - 1 (half size) |
| mSATA | - 1 (full size) |
| PCIe | - 1 (x1) |
| Memory | |
| Technology | - Single Channel DDR3L 1333/1066 MHz SDRAM (By CPU) |
| Max. | - 8GB |
| Socket | - 1 x SO-DIMM |
| Graphics | |
| Controller | - Intel® Gen7 Intel® Graphics DX 11*, OGL3.0 |
| VRAM | - Shared Memory |
| VGA | - Supports max. resolution 1920 x 1200 |
| LVDS | - Dual Channel 24-bit, max resolution 1920x1200@60Hz |
| HDMI | - Supports HDMI 1.4a, max resolution 1920x1200 |
| MultiDisplay | - Yes (Dual Display) |
| Ethernet | |
| Ethernet | - 10/100/1000 Mbps |
| Controller | - GbE LAN: Intel 82583V |
| Connector | - 1 x RJ 45 |
| SATA | |
| Max Data Transfer Rate | - SATAII (3.0Gb/s) |
| Rear I/O | |
| VGA | - 1 |
| HDMI | - 1 |
| Ethernet | - 1 |
| USB | - 4 (1 x USB 3.0, 3 x USB 2.0) |
| Audio | - 2 (Mic-in, Line-out) |
| Parallel | - 1 |
| Serial | - 1 x RS-232, 1 x RS-232/422/485. with 5V/12V selectable header |
| PS2 | - 1 (Combo) |
| DC-input | - 1 |
| Internal Connector | |
| USB | - 5 (4 x USB 2.0 via 2 x10pin header, 1 x USB2.0 via 5pin header) |
| LVDS / inverter | - 1/1 |
| Serial | - 3 (3 x RS-232 with 5V/12V selectable header) |
| SATA | - 2 x SATAII (3.0Gb/s) |
| mPCIe | - 1 |
| mSATA | - 1 (shared SATA2) |
| GPIO 8-bit | - Programable |
| Chassis intrusion | - 1 (via 12pin header) |
| Audio Header | - 1 |
| Watchdog Timer | |
| Output | - From Super I/O to drag RESETCON# |
| Interval | - 256 segments, 0,1,2...255sec/min |
| Power Requirements | |
| Input PWR | - 12V DC-In (2-pin PWR Con) |
| Power On | AT/ATX Supported - AT : Directly PWR on as Power input ready - ATX: Press Button to PWR on after Power input ready |
| Certifications | |
| Certifications | - CE, FCC, RoHS, REACH |
| Environment | |
| Temperature | - Operating: 0– 60 - Storage: -20– 85 |