


279.00 EUR  
 incl. 19% VAT, plus [shipping](#)

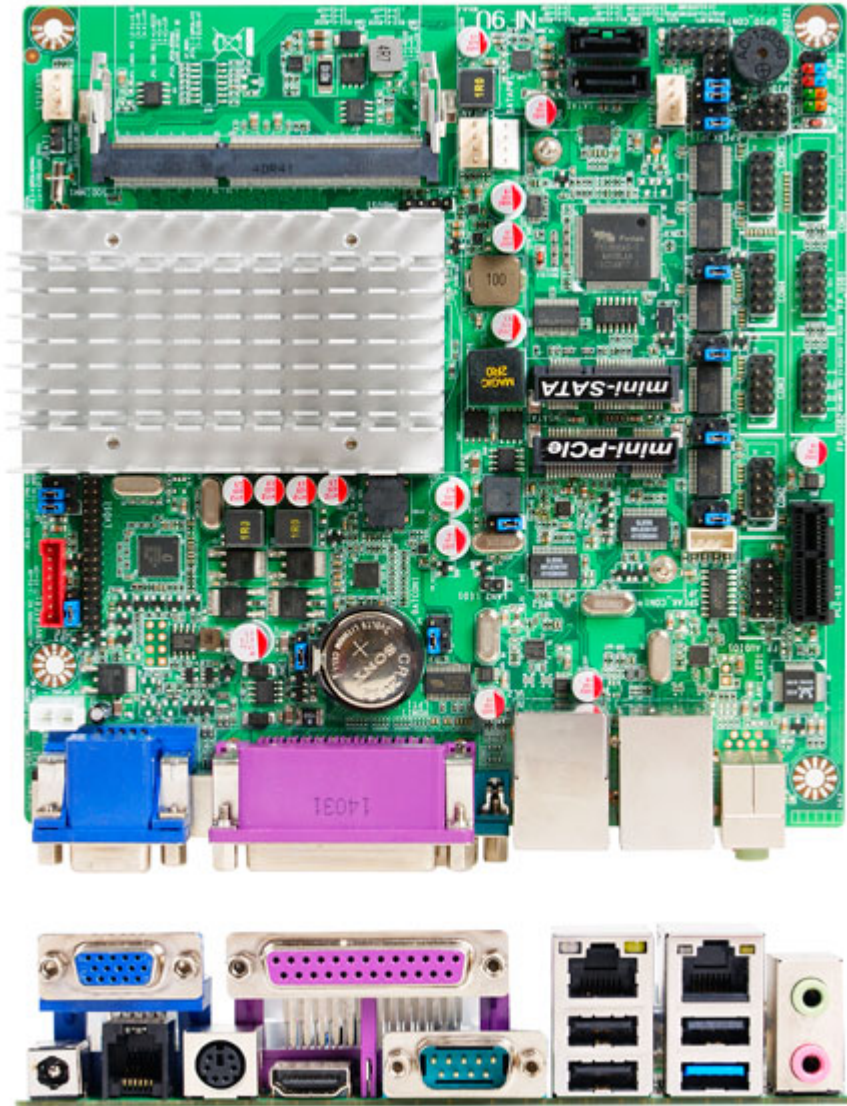

- Intel® Baytrail-M/D/I Processor
- Integrated Intel® Gen7 Intel® Graphics DX 11\*, OGL3.0
- Supports Single Channel DDR3L 1333/1066 MHz,
- 1 x SO-DIMM, up to 8GB system memory
- 1 x RJ11 port, 1 x parallel port
- 1 x VGA, 1 x HDMI, 1 x Dual Channel 24-bit LVDS
- 1 x USB 3.0, 7 x USB 2.0, 2 x SATAII
- 1 x mini-PCIe, 1 x PCIe x1 slot
- Gigabit LAN : 2 x LAN
- Support CPU Over-Temperature protection
- Support CPU Over-Current/Under Voltage protection
- Support DRAM Over-Current/Under Voltage protection
- Support CPU Smart Fan
- Support DC Fan

<b>Form Factor</b>	
Dimensions	Mini-ITX ( 170 x 170mm)
<b>Processor System</b>	
CPU	Intel® Baytrail-M/D/I Processor
Core Number	(By CPU)

Max Speed	- (By CPU)
L2 Cache	- (By CPU)
Chipset	- N/A
BIOS	- AMI 64Mb Flash ROM
<b>Expansion Slot</b>	
PCI	- 0
Mini-PCIe	- 1 (Half size)
mSATA	- 1
PCIe	- 1
CFast Card Socket	- 0
CF Card Socket	- 0
<b>Memory</b>	
Technology	- 1 * Single Channel DDR3L 1333/1066 MHz SDRAM
Max.	- 8GB
Socket	- 1 * SO-DIMM
<b>Graphics</b>	
Controller	- Intel® HD Graphics
VRAM	- Shared Memory
VGA	- 1 (Support max resolution 2048X1536)
LVDS	- 1 * Onboard 24-bits dual channel connector (resolution 1920x1080)
HDMI	- 1 (resolution1920x1080)
DVI-I	- No
DisplayPort	- No
MultiDisplay	- Yes (Dual Display)
<b>Ethernet</b>	
Ethernet	- 10/100/1000 Mbps
Controller	- GbE LAN: RTL8111G
Connector	- 2 * RJ 45
<b>SATA</b>	
Max Data Transfer Rate	- 2 * SATAII (3.0Gb/s)
<b>Rear I/O</b>	
VGA	- 1
DVI-I	- 0
HDMI	- 1
DisplayPort	- 0
Ethernet	- 2
RJ11	- 1
USB	- 4 (3 * USB 2.0 + 1 * USB3.0)
Audio	- 2 (MIC/Line-out)
Serial	- 1 (RS-232/422/485 with 5V/12V selectable header)
Parallel	- 1
eSATA	- 0
PS2	- 1
DC-input	- 1
<b>Internal Connector</b>	
USB	- 4 ( 2 * USB 2.0 via 9 pin header )
PS2	- 0
LVDS / inverter	- 1
VGA	- 0
Serial	- 5 (5 x RS-232 with 5V/12V selectable header)
SATA	- 2 * SATAII (3.0Gb/s)
mPCIe	- 1
Parallel	- 0
mSATA	- 1
CIR	- 0

GPIO 8-bit	- 4in / 4 out
Chassis intrusion	- 1 (via 2pin header)
Audio Header	- 1
<b>Watchdog Timer</b>	
Output	- From Super I/O to drag RESETCON#
Interval	- 256 segments, 0,1,2...255sec/min
<b>Power Requirements</b>	
Input PWR	- 9~24V DC-In
Power On	AT/ATX Supported - AT : Directly PWR on as Power input ready - ATX: Press Button to PWR on after Power input ready
<b>Certifications</b>	
Certifications	- CE, FCC, RoHS, REACH
<b>Environment</b>	
Temperature	- Operating: 0■- 60■
	- Storage: -20■- 85■